

UNCLASSIFIED

AD NUMBER	
AD377011	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO:	Approved for public release, distribution unlimited
FROM:	Distribution: Further dissemination only as directed by Director, Naval Research Laboratory, Washington, DC 20390, 10 OCT 1966, or higher DoD authority.
AUTHORITY	
NRL ltr dtd 17 Sep 2007; NRL ltr dtd 17 Sep 2007	

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER
AD377011
CLASSIFICATION CHANGES
TO
confidential
FROM
secret
AUTHORITY
31 Oct 1978, per document marking, DoDD 5200.10

THIS PAGE IS UNCLASSIFIED

SECURITY

MARKING

The classified or limited status of this report applies to each page, unless otherwise marked.

Separate page printouts MUST be marked accordingly.

THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 AND 794. THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

2

SECRET

NRL Report 6485
Copy No. 1

110223

**Results of Acceleration and Velocity Processing
of HF Radar Signals From Missile Launches**
Part 2 - Observations of ETR Tests 0169 and 3670
[Unclassified Title]

G. K. JENSEN, J. E. MCGEOGH, AND J. H. VEEDER

*Radar Techniques Branch
Radar Division*

October 10, 1966



NAVAL RESEARCH LABORATORY
Washington, D.C.

DDC CONTROL
NO 64993

SECRET

Downgraded at 12 year intervals,
Not automatically declassified

SEE INSIDE OF COVER FOR DISTRIBUTION RESTRICTIONS

SECRET

PREVIOUS REPORT IN THIS SERIES

"Part 1 - Observations of ETR Tests 2949, 6075, and 3635," G.K. Jensen, J.E. McGeogh, and J.H. Veeder, NRL Report 6476 [Unclassified Title, Secret Report],

SECURITY

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794. The transmission or revelation of its contents in any manner to an unauthorized person is prohibited by law.

In addition to security requirements which apply to this document and must be met, it may be further distributed by the holder *only* with specific prior approval of the Director, Naval Research Laboratory, Washington, D.C. 20390.

SECRET

SECRET

CONTENTS

Abstract	ii
Problem Status	ii
Authorization	ii
INTRODUCTION	1
RESULTS	2
Test 0169	3
Test 3670	6
COMMENTS	8
SUMMARY	8
REFERENCES	10

SECRET

SECRET

ABSTRACT

[Secret]

The acceleration and velocity signal processor developed at the Naval Research Laboratory was employed with the hf transmitter and receiving equipment located at the Chesapeake Bay Division site to observe missiles launched along the Eastern Test Range.

The spectral compression and coherent integration techniques utilized in processing the return radar echoes resulted in improved resolution and signal-to-noise ratio, and provided target acceleration as a parameter, along with velocity and range.

Target tracks of high definition are shown for the second stages, spent first stages, and nose fairings of ETR tests 0169 (Saturn) and 3670 (A3 Polaris).

PROBLEM STATUS

This is an interim report on one phase of the problem; work is continuing on this and other phases.

AUTHORIZATION

NRL Problem R02-42
Project MIPR(30-602) 64-3412

Manuscript submitted August 22, 1966.

SECRET

SECRET

RESULTS OF ACCELERATION AND VELOCITY PROCESSING OF HF RADAR SIGNALS FROM MISSILE LAUNCHES

Part 2 - Observations of ETR Tests 0169 and 3670

[Unclassified Title]

INTRODUCTION

The acceleration and velocity signal processor was proposed (1) and developed (2-5) at NRL. Its purpose is to provide near-optimum signal-to-noise enhancement, as well as near-optimum velocity and acceleration resolution for accelerating (missile) targets as well as constant-velocity (aircraft) targets, through employment of a spectral compression technique with coherent integration. This is accomplished by acceleration matching (1) the change in the accelerating target doppler frequency occurring over the memory storage period in order to achieve a compression of the spread target spectrum. The benefits of this operation are an improvement of the signal-to-noise ratio (SNR), an improvement in velocity resolution, and the acquisition of target acceleration as a parameter (velocity and range are also obtained). Signal processing of the target echo is completed by performing a matched filter operation on the spectrally compressed target spectrum to effect primarily a coherent integration over the number of samples (either 1800 or 3600) stored in the memory and a corresponding improvement in SNR.

The ultimate purpose of the acceleration and velocity processor proposal and development is the creation of a radar with at least the following capabilities:

1. One which will extract the largest possible quantity of information from each of many targets in real time without off line signal processing. The number of parameters and their resolutions are made as high as possible. The parameters are acceleration, acceleration-rate (if desired), velocity, range, azimuth, amplitude, plus-minus acceleration, and recede-approach velocity.
2. One which will achieve the highest possible signal processing gain through the use of coherent and incoherent integration and near-ideal signal matching processes, enabling over-the-horizon (OTH) detection of even small component parts of missiles.
3. One which requires the least complex automatic detection equipment because of the high-quality signal processor output.
4. One capable of separating and processing accelerating, constant-velocity, or zero-velocity target signals of all amplitudes (including very low and very large) in a manner to prevent any type of signal from masking or reducing the radar sensitivity for either of the other types, or a like type. For example, the large backscatter clutter is prevented from masking low-level echoes under any conditions, large accelerating targets are prevented from spreading and masking other target echoes, and accelerating targets which are displaced only 1 or 2 sec in time may also be separated.
5. One with the widest possible signal dynamic range in order to minimize the undesirable effects of high-level interference or jamming.

SECRET

6. One designed to process all resolution cells of all parameters, to process all target types, and to process multiple targets without compromises or tradeoffs which would otherwise result in the loss of information or the inability to acquire certain information.

7. One possessing a high order of functional efficiency through multipurpose design, simplified circuitry, real-time data acquisition, and the absence of the need for off line signal processing. The functional efficiency will aid in minimizing the cost of acquiring the wealth of information existing in all the range-azimuth cells which an operational radar will need to cover.

The results obtained with the present limited acceleration and velocity processor and the proposals and ideas for improvements in (a) the acceleration and velocity processor, (b) the memory, and (c) the data processor indicate that the above ultimate goals may be fully achieved. All of the most important principles required to achieve the above goals have been verified with the present limited acceleration and velocity signal processor.

The present limited acceleration and velocity signal processor is in use with the hf transmitter and receiving equipment installed at the Chesapeake Bay Division (CBD) site.

Earlier results (6,7) of missile observations obtained with the present acceleration and velocity processor were directed toward proving principles and did not utilize or demonstrate the full capability of even the limited system; only one of the 12 acceleration gate channels was used and none of the data were displayed as a function of time. In the acquisition of the data, to be described, advantage was taken of utilizing all of the available capabilities in order to more completely demonstrate the full extent of the capabilities of acceleration and velocity signal processing. It should be noted, however, that the processor is limited to 12 acceleration analysis channels (limited funding permitted development of only 12 acceleration channels), whereas a full system was desired with 100 or more channels (acceleration bins).

The 12-channel or partial system is capable of analyzing any 12 acceleration bins and all the velocity and the range bins for targets in either real time or from continuous prerecorded magnetic tape recorder playback at the real-time rate. Other acceleration bins must be analyzed on subsequent reruns of the tape. It should be emphasized that a full acceleration and velocity signal processing system will have no such limitation and that all acceleration, velocity, and range bins may be analyzed in real time.

RESULTS

Data obtained from two missiles (a Polaris A3, Test No. 3670, and a Saturn, Test No. 0169) launched down the Eastern Test Range (ETR) will be presented. In the case of the Polaris launch a radar pulse recurrence frequency (prf) of 90 cps, a pulse width of about 700 μ sec, a transmitter average power of 100 KW, and a rotatable antenna having a free-space one-way antenna gain of about 13 db were used. Illumination was via a one-hop F-layer ionospheric propagation path.

Because of the geometrical locations of the radar at the CBD site and the ETR, the propagation path and the Polaris missile trajectory intersect at a 90-degree angle about 140 sec after launch, as will be noted on Fig. 3.

In the case of the Saturn, a prf of 180 pps and a pulse width of about 340 μ sec were employed with line-of-sight illumination. The other above parameters were unchanged.

Although several operating procedures are possible for the limited system, the figures which follow were obtained by setting the 12 acceleration gates as a fan of 12 consecutive accelerations and photographing the combined analyzer output as the input was fed either in real time from the receiver (via the storage drum) or at the real-time rate from a magnetic tape recorder which had previously recorded the receiver output. Several readouts, each with a different acceleration fan, are generally required for a complete analysis.

Test 0169 -- Saturn Launch

Figure 1 presents the radial velocity versus time after launch for a Saturn, ETR Test 0169, observed in this case by direct look at an operating frequency of 22.6 Mc/s and a prf of 180 cps. The input was obtained from magnetic tape at the real-time rate. The top view shows the processed output for a fan of positive accelerations, the center view for a fan of negative accelerations, and the bottom view also for negative accelerations but with a readjustment of the system to discriminate against the diffuse signal and also for a later time period and half the velocity extent.

Several well-defined target tracks are shown. These are the spent first stage, the powered second stage, and a near-range aircraft. The fan of accelerations has been split in order to show both first and second stages on the same readout. Most of the acceleration gates are centered about the high value of the burning second stage, with just enough set at low value to show the spent first stage. No zero slope (constant velocity) or very low value acceleration slopes were used in this readout.

The top view shows the early positive readout of the burning second stage, commencing with the onset of target illumination. Foldover of the doppler frequency occurs when the doppler reaches one-half the prf and is equivalent to a radial velocity of approximately 1000 knots. A continuation beyond foldover distinctly appears on the center view as the steeper of the early tracks. On this same view a very long track of the spent first stage may be seen. It is obscured for an interval by the diffuse signal, but a further system capability permits adjustment to display that track without the diffuse signal interference, as shown in the bottom view for the lower half of the doppler extent. The last track in the bottom view is the near-range aircraft shown only for an interval of time where a turn produced a radial acceleration that happened to match an acceleration gate. Other tracks that are shown are believed to be related to the missile but are not positively identified.

The target tracks of Fig. 1 are replotted on Fig. 2 to compare them with values calculated from postflight data obtained for both the spent first stage and the powered second stage. Although exact agreement is not obtained, the assumptions used in the calculations are considered to have caused the difference, and the identification of the tracks appear reasonable. A ray-path-type diagram is shown in the lower view, but this merely shows the straight line rays for elevation angles of 0 and 3 degrees to aid in estimating the onset of target illumination.

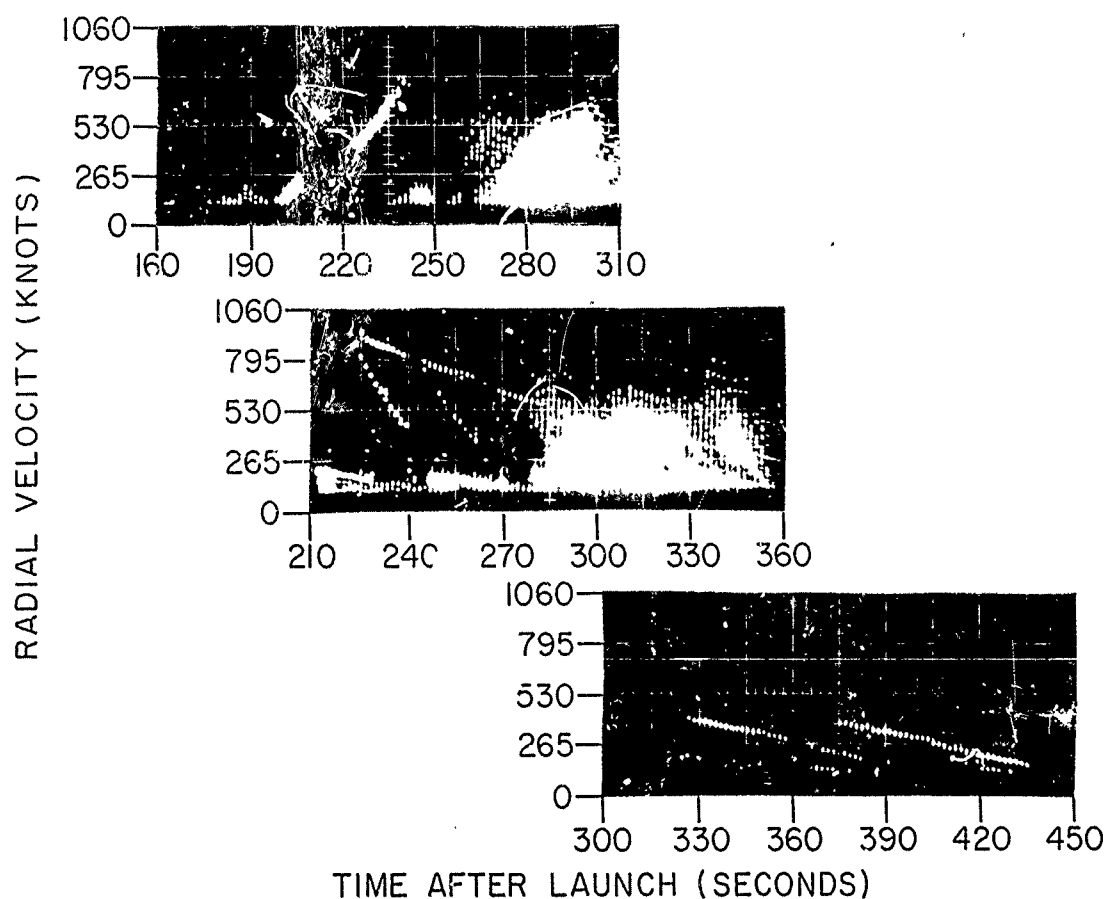


Fig. 1 - Velocity-time profile of ETR Test 0169 (Saturn launch). Upper profile is for accelerating targets; middle profile is for decelerating targets; bottom profile is an extension of middle profile to later times and for half the velocity interval. The ability of the system to separate discrete targets from diffuse echoes is demonstrated in the bottom profile.

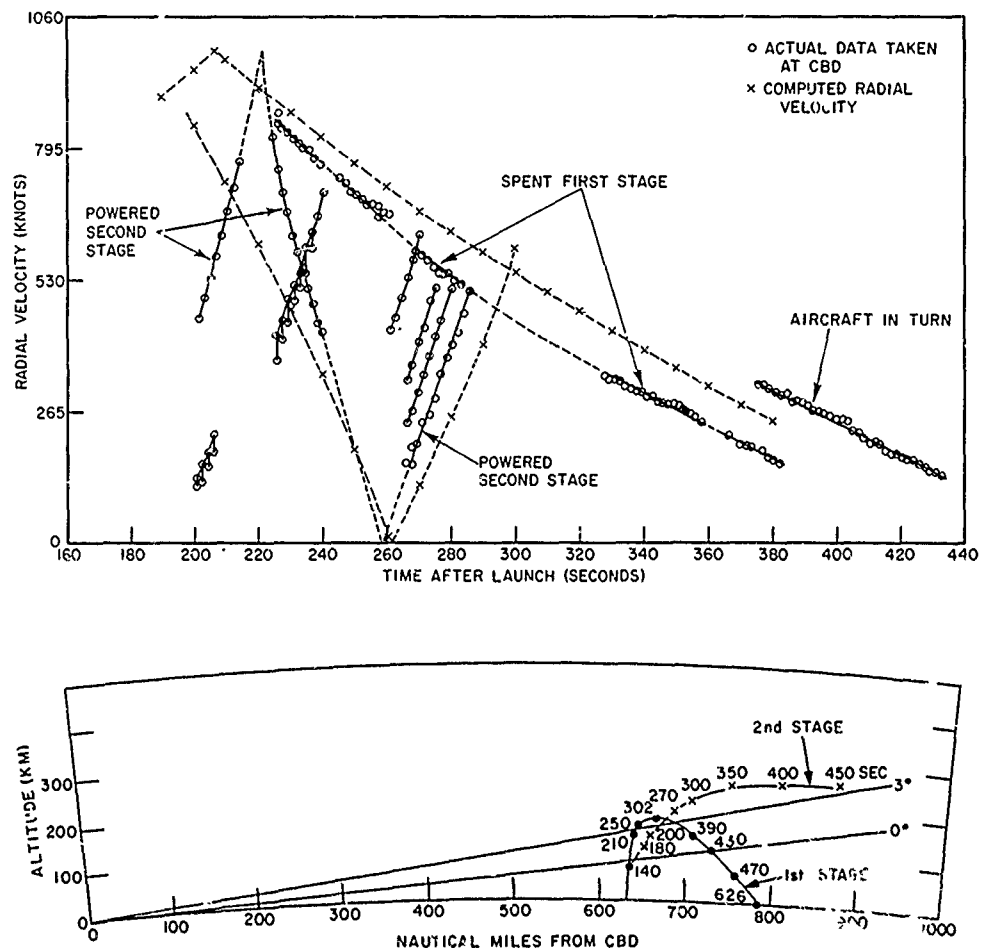


Fig. 2 - (top) Calculated velocity-time profiles of ETR Test 0169 from ETR postflight information compared with actual radar data points transcribed from Fig. 1; (Bottom) ray path diagram applicable to ETR Test 0169. Numbers on target trajectories in the bottom figure indicate the time after launch (in seconds).

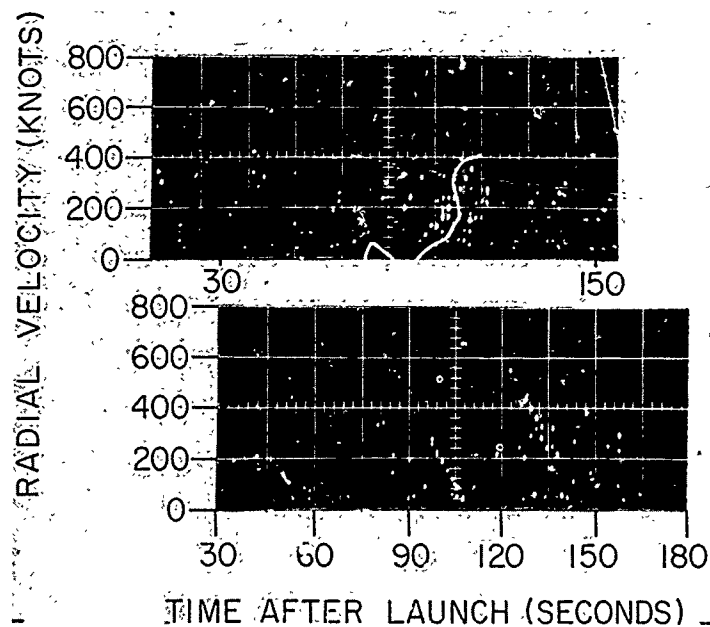


Fig. 3 - Velocity-time profiles of ETR Test 3670 (A3 Polaris launch). Upper profile is for accelerating targets; bottom profile is for decelerating targets.

Test 3670 — A3 Polaris Launch

Figure 3 shows the result obtained for ETR Test 3670, a Polaris A3 launch which was illuminated via the ionosphere. Input was obtained from the tape recorder. The carrier frequency was 18.036 Mc/s and the prf was 90 cps. Several tracks may be seen. The negative track beginning at about 128 sec is identified as the powered second stage. Those appearing earlier are believed to be related to the first stage and the nose fairing jettison.

The tracks are replotted in Fig. 4. The computed velocity-time characteristic based on ETR postflight data is shown to confirm the identity of the return echoes and to indicate the unusual shape of the curve due to the geometry of the observation site with respect to the missile trajectory. The trajectory of many missiles launched from ETR intersect the illuminating radar ray path at right angles at some point during the period of powered flight. The radar observed velocity (in the direction of the ray path) is zero at the right-angle condition, as illustrated at 142 sec. The velocity-time curve prior to that point indicates an approaching target and is also typical of many ETR missile launches as observed from the CBD site.

Actual data points were taken from the discrete tracks of Fig. 3 and plotted on Fig. 4. One of the tracks coincides with the computed curve and is assumed to be the burning second stage. The remaining tracks coincide with portions of the expected profile of the spent first stage and the nose fairing.

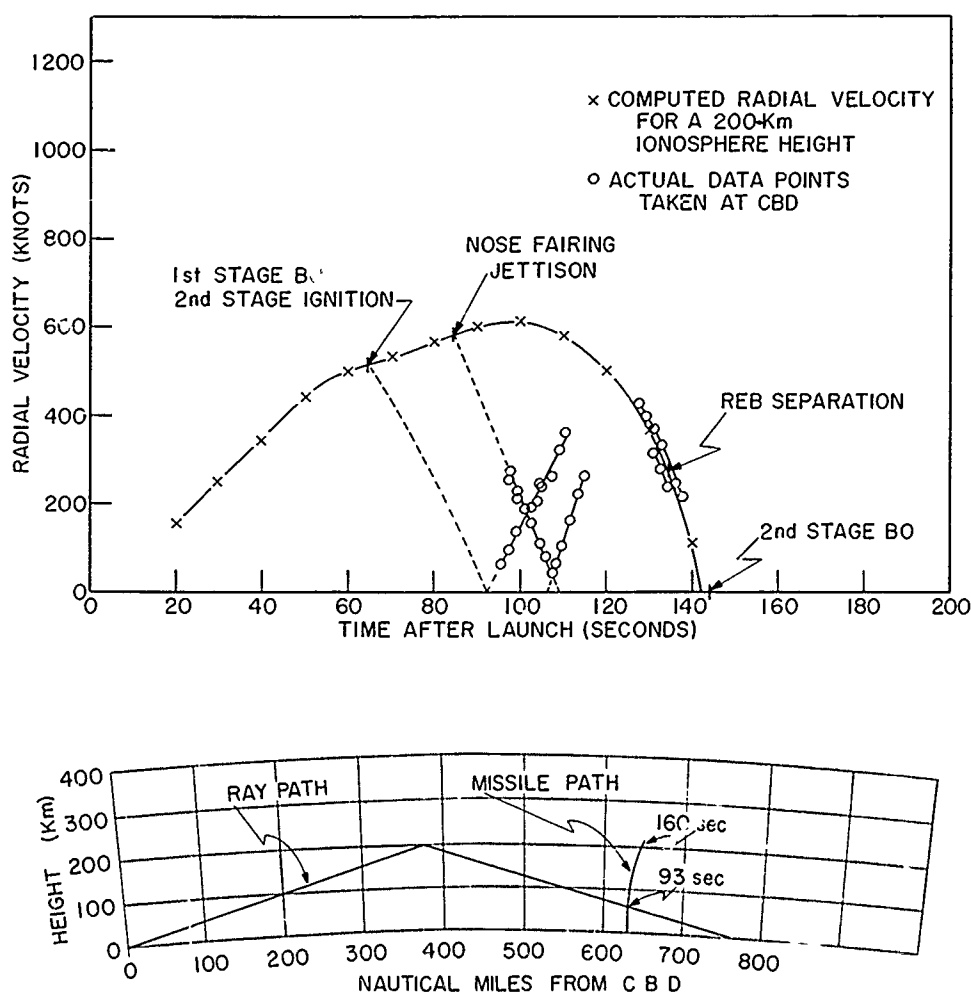


Fig. 4 - (top) Calculated velocity-time profiles of ETR Test 3670 from ETR postflight information compared with actual radar data points transcribed from Fig. 3; (bottom) signal ray path applicable to ETR Test 3670. Times shown on missile path in bottom figure indicate the time after launch.

A ray plot is also included in Fig. 4 for Test 3670. The radar skip range ray is shown, which means that the missile was not illuminated until about 90 sec after launch. Thus, there was no chance of seeing earlier echoes, which would have been highly desirable.

A threshold circuit was employed at the output of the acceleration and velocity signal processor. This circuit was adjusted for an output SNR such that, in the absence of a signal, noise peaks caused a few triggering events per minute. Reference to Fig. 3 shows the light noise background produced by the above choice of level. Of course other levels may also be selected.

COMMENTS

The background in the photographic strips is relatively free of other signals because the velocity-time characteristics of only those signals having finite accelerations (zero acceleration and the first few of the lowest acceleration bins have been excluded) are displayed in the photographs. Constant-velocity targets, such as aircraft, most meteor effects, diffuse signals, and most interference will not appear but instead may be separated, because of the discriminating capability afforded by the acceleration parameter, and placed on another display of velocity-time for zero- and low-acceleration targets.

The acceleration and velocity signal processor also provides other information which has not been presented here. Acceleration and range information on all targets is available. Azimuth information may also be obtained from a complete two-channel acceleration and velocity processor, as may the approach-recede character of velocity.

The following information is available and should be presented to an operator in a useful and meaningful manner: (a) acceleration, deceleration, velocity, approach or recede, range, azimuth, and time; (b) missile and aircraft targets separated and independently displayed; and (c) information facilitating separation and identification of multiple targets.

Additional information, primarily of interest for research purposes, is also available in the form of target amplitude. Individual targets may be gated out and spectrum analyzed. Other studies of the amplitude versus the various parameters may also be accomplished.

The Naval Research Laboratory's recent experience and findings with acceleration and velocity signal processing and display is being prepared for publication in a forthcoming report. This experience has also suggested methods of improving processor capability, methods of simplifying and reducing the electronics, methods of increasing reliability, improvements in the storage memory, etc., which will also be included. This work, of course, has the goal of creating a radar with the broad capabilities previously mentioned. An earlier report covering recommended improvements has been published (8).

SUMMARY

1. Discrete return echo tracks of a Saturn missile second stage, first stage, and other component parts are shown.

A diffuse return signal from the F-layer height is also shown, which may be separated from the discrete tracks.

2. Discrete return echo tracks of a Polaris missile second stage, spent first stage, and nose fairing are shown for a one-hop ionospheric propagation path.

3. A wide range of accelerations were readily matched, thus providing the acceleration parameter.

4. The resolution and SNR of accelerating targets were improved by the addition of acceleration procession. Even small missile parts were detected.

5. Missile (accelerating) targets were presented as well-defined tracks which were separated from constant-velocity (aircraft) targets, most meteor effects, diffuse signals, and interference; this resulted in a relatively clear display background.

6. High velocity resolution and high acceleration resolution are provided for either small or large amplitude returns from accelerating targets.

7. Accelerating targets may be separated from constant-velocity targets and viewed on separate displays. This allows separation of most aircraft and meteors from the missile displays, but still retains the information on a constant-velocity display. This separation is similar to the method where fixed and low-velocity targets (including backscatter) are separated from the velocity display.

8. Well-defined target velocity vs time tracks are provided, even in the presence of large diffuse signals and meteors, and can be displayed separately from the diffuse signals and meteors.

9. The partial acceleration and velocity signal processor is a valuable research tool to further the study of improved processing methods and to aid in studies of target and ionospheric characteristics.

10. Experience with the acceleration and velocity signal processor, data handling, and display system has lead to proposals for improvements in all of these items, as well as a proposal for a new type of memory, which form the bases for an hf radar with extensive capabilities.

SECRET

REFERENCES

1. Jensen, G.K., "An Improved Gate System for the Madre Radar," NRL Report 5570 (Unclassified Title, Secret Report), Dec. 1960
2. Jensen, G.K., and McGeogh, J.E., "Development of a Gate System for the Improvement of the Madre Radar, Part 1 - System Theory, Calculations, and Planning," NRL Report 5876 (Unclassified Title, Secret Report), Jan. 1963
3. Jensen, G.K., and McGeogh, J.E., "Development of a Gate System for the Improvement of the Madre Radar, Part 2 - Development of Key Circuits and a Signal Simulator," NRL Report 5899 (Unclassified Title, Secret Report), Feb. 1963
4. Jensen, G.K., and McGeogh, J.E., "Development of a Gate System for the Improvement of the Madre Radar, Part 3 - Experimental Verification of System Theory by Means of the Signal Simulator and Key System Components," NRL Report 5900 (Unclassified Title, Secret Report), Feb. 1963
5. Jensen, G.K., and McGeogh, J.E., "Development of a Gate System for the Improvement of the Madre Radar, Part 4 - Laboratory Evaluation of the Complete System and Report of Recent Circuit Developments," NRL Report 5926 (Unclassified Title, Secret Report), Apr. 1963
6. McGeogh, J.E., Jensen, G.K., and Veeder, J.H., "Development of a Gate System for the Improvement of the Madre Radar, Part 5 - Observations of Tests 0169 and 2084," NRL Report 6238 (Unclassified Title, Secret Report), Feb. 1965
7. McGeogh, J.E., Jensen, G.K., and Veeder, J.H., "Development of a Gate System for the Improvement of the Madre Radar, Part 6 - Observations of Tests 0351 and 0050," NRL Report 6289 (Unclassified Title, Secret Report), May 1965
8. Jensen, G.K., "A Proposed Simplified Signal Processor for the Improvement of the Madre Radar," NRL Report 6237 (Unclassified Title, Secret Report), Mar. 1965

SECRET

SECRET

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1 ORIGINATING ACTIVITY (Corporate author) Naval Research Laboratory Washington, D.C. 20390		2a. REPORT SECURITY CLASSIFICATION SECRET
		2b GROUP 3
3 REPORT TITLE RESULTS OF ACCELERATION AND VELOCITY PROCESSING OF HF RADAR SIGNALS FROM MISSILE LAUNCHES. PART 2 - OBSERVATIONS OF ETR TESTS 0169 AND 3670 [Unclassified Title].		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) An interim report on one phase of the problem.		
5 AUTHOR(S) (Last name, first name, initial) Jensen, G.K., McGeogh, J.E., and Veeder, J.H.		
6. REPORT DATE October 10, 1966	7a TOTAL NO. OF PAGES 15	7b. NO. OF REFS 8
8a CONTRACT OR GRANT NO. NRL Problem R02-42 b PROJECT NO MIPR(30-602) 64-3412 c. d.	9a. ORIGINATOR'S REPORT NUMBER(S) NRL Report 6485 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) None	
10. AVAILABILITY/LIMITATION NOTICES In addition to security requirements which apply to this document and must be met, it may be further distributed by the holder <u>only</u> with specific approval of the Director, Naval Research Laboratory, Washington, D.C. 20390		
11. SUPPLEMENTARY NOTES None	12. SPONSORING MILITARY ACTIVITY Dept. of the Air Force	
13. ABSTRACT [Secret] The acceleration and velocity signal processor developed at the Naval Research Laboratory was employed with the hf transmitter and receiving equipment located at the Chesapeake Bay Division site to observe missiles launched along the Eastern Test Range. The spectral compression and coherent integration techniques utilized in processing the return radar echoes resulted in improved resolution and signal-to-noise ratio, and provided target acceleration as a parameter, along with velocity and range. Target tracks of high definition are shown for the second stages, spent first stages, and nose fairings of ETR tests 0169 (Saturn) and 3670 (A3 Polaris).		

DD FORM 1 JAN 64 1473

11

SECRET

Security Classification

SECRET

Security Classification

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Radar signals Signal processing System performance High frequency						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.

<p style="text-align: center;">SECRET</p> <p>Naval Research Laboratory. Report 6485 [SECRET-Gp.3]. RESULTS OF ACCELERATION AND VELOCITY PROCESSING OF HF RADAR SIGNALS FROM MISSILE LAUNCHES. PART 2 - OBSERVATIONS OF ETR TESTS 0169 AND 3670 [Unclassified Title], by G.K. Jensen, J.E. McGeogh, and J.H. Veeder. 15 pp. and 4 figs., October 10, 1966.</p> <p>The acceleration and velocity signal processor developed at the Naval Research Laboratory was employed with the hf transmitter and receiving equipment located at the Chesapeake Bay Division site to observe missiles launched along the Eastern Test Range.</p> <p style="text-align: right;">Downgraded at 12 year intervals Not automatically declassified</p>	<ol style="list-style-type: none"> 1. Radar signals - Processing 2. Early warning radar systems - Perform. 3. Ballistic missiles - Detection <ol style="list-style-type: none"> I. Jensen, G.K. II. McGeogh, J.E. III. Veeder, J.H. 	<p style="text-align: center;">SECRET</p> <p>Naval Research Laboratory. Report 6485 [SECRET-Gp.3]. RESULTS OF ACCELERATION AND VELOCITY PROCESSING OF HF RADAR SIGNALS FROM MISSILE LAUNCHES. PART 2 - OBSERVATIONS OF ETR TESTS 0169 AND 3670 [Unclassified Title], by G.K. Jensen, J.E. McGeogh, and J.H. Veeder. 15 pp. and 4 figs., October 10, 1966.</p> <p>The acceleration and velocity signal processor developed at the Naval Research Laboratory was employed with the hf transmitter and receiving equipment located at the Chesapeake Bay Division site to observe missiles launched along the Eastern Test Range.</p> <p style="text-align: right;">Downgraded at 12 year intervals Not automatically declassified</p>	<ol style="list-style-type: none"> 1. Radar signals - Processing 2. Early warning radar systems - Perform. 3. Ballistic missiles - Detection <ol style="list-style-type: none"> I. Jensen, G.K. II. McGeogh, J.E. III. Veeder, J.H.
<p style="text-align: center;">SECRET</p> <p>Naval Research Laboratory. Report 6485 [SECRET-Gp.3]. RESULTS OF ACCELERATION AND VELOCITY PROCESSING OF HF RADAR SIGNALS FROM MISSILE LAUNCHES. PART 2 - OBSERVATIONS OF ETR TESTS 0169 AND 3670 [Unclassified Title], by G.K. Jensen, J.E. McGeogh, and J.H. Veeder. 15 pp. and 4 figs., October 10, 1966.</p> <p>The acceleration and velocity signal processor developed at the Naval Research Laboratory was employed with the hf transmitter and receiving equipment located at the Chesapeake Bay Division site to observe missiles launched along the Eastern Test Range.</p> <p style="text-align: right;">Downgraded at 12 year intervals Not automatically declassified</p>	<ol style="list-style-type: none"> 1. Radar signals - Processing 2. Early warning radar systems - Perform. 3. Ballistic missiles - Detection <ol style="list-style-type: none"> I. Jensen, G.K. II. McGeogh, J.E. III. Veeder, J.H. 	<p style="text-align: center;">SECRET</p> <p>Naval Research Laboratory. Report 6485 [SECRET-Gp.3]. RESULTS OF ACCELERATION AND VELOCITY PROCESSING OF HF RADAR SIGNALS FROM MISSILE LAUNCHES. PART 2 - OBSERVATIONS OF ETR TESTS 0169 AND 3670 [Unclassified Title], by G.K. Jensen, J.E. McGeogh, and J.H. Veeder. 15 pp. and 4 figs., October 10, 1966.</p> <p>The acceleration and velocity signal processor developed at the Naval Research Laboratory was employed with the hf transmitter and receiving equipment located at the Chesapeake Bay Division site to observe missiles launched along the Eastern Test Range.</p> <p style="text-align: right;">Downgraded at 12 year intervals Not automatically declassified</p>	<ol style="list-style-type: none"> 1. Radar signals - Processing 2. Early warning radar systems - Perform. 3. Ballistic missiles - Detection <ol style="list-style-type: none"> I. Jensen, G.K. II. McGeogh, J.E. III. Veeder, J.H.

SECRET

The spectral compression and coherent integration techniques utilized in processing the return radar echoes resulted in improved resolution and signal-to-noise ratio, and provided target acceleration as a parameter, along with velocity and range.

Target tracks of high definition are shown for the second stages, spent first stages, and nose fairings of ETR tests 0169 (Saturn) and 3670 (A3 Polaris). [Secret Abstract]

SECRET

SECRET

The spectral compression and coherent integration techniques utilized in processing the return radar echoes resulted in improved resolution and signal-to-noise ratio, and provided target acceleration as a parameter, along with velocity and range.

Target tracks of high definition are shown for the second stages, spent first stages, and nose fairings of ETR tests 0169 (Saturn) and 3670 (A3 Polaris). [Secret Abstract]

SECRET

SECRET

The spectral compression and coherent integration techniques utilized in processing the return radar echoes resulted in improved resolution and signal-to-noise ratio, and provided target acceleration as a parameter, along with velocity and range.

Target tracks of high definition are shown for the second stages, spent first stages, and nose fairings of ETR tests 0169 (Saturn) and 3670 (A3 Polaris). [Secret Abstract]

SECRET

SECRET

The spectral compression and coherent integration techniques utilized in processing the return radar echoes resulted in improved resolution and signal-to-noise ratio, and provided target acceleration as a parameter, along with velocity and range.

Target tracks of high definition are shown for the second stages, spent first stages, and nose fairings of ETR tests 0169 (Saturn) and 3670 (A3 Polaris). [Secret Abstract]

SECRET

Naval Research Laboratory

Technical Library


Research Reports & Bibliography Unit

To: Larry Downing, DTIC
From: Darlene DeMarr, Code 5596.3
Date: 9/17/2007
Subject: Change in Classification & Distribution Statement

Please change the classifications & distribution statement on the following documents to
Unclassified/Unlimited Distribution:

ADC954564 (NRL-3703-PT-1)	Declassified with no restrictions 9/11/1996
AD0348828 (NRL-6066)	Declassified with no restrictions 9/30/1996
AD0348901 (NRL-6037)	Declassified with no restrictions 12/3/1996
AD0352827 (NRL-6117)	Declassified with no restrictions 1/25/1996
AD0361630 (NRL-6247)	Declassified with no restrictions 1/7/1997
AD0377010 (NRL-6476)	Declassified with no restrictions 1/29/1997
AD0377011 (NRL-6485)	Declassified with no restrictions 1/29/1997
AD0377242 (NRL-6479)	Declassified with no restrictions 1/29/1997
AD0379058 (NRL-6508)	Declassified with no restrictions 1/29/1997
AD0379893 (NRL-6507)	Declassified with no restrictions 1/29/1997
AD0346383 (NRL-6015)	Declassified with no restrictions 1/29/1997
AD0349268 (NRL-6079)	Declassified with no restrictions 1/29/1997
AD0355651 (NRL-6198)	Declassified with no restrictions 1/29/1997
AD0368068 (NRL-6371)	Declassified with no restrictions 1/29/1997

Thank you,



Darlene DeMarr
(202) 767-7381
demarr@nrl.navy.mil